




213002
LAT45-10MIU-B5
Laser distance sensors

- IO-Link
- Long range
- Very good color and surface independence
- Red-light laser for simple alignment
- Measured values on display
- Easy to operate
- Robust metal housing

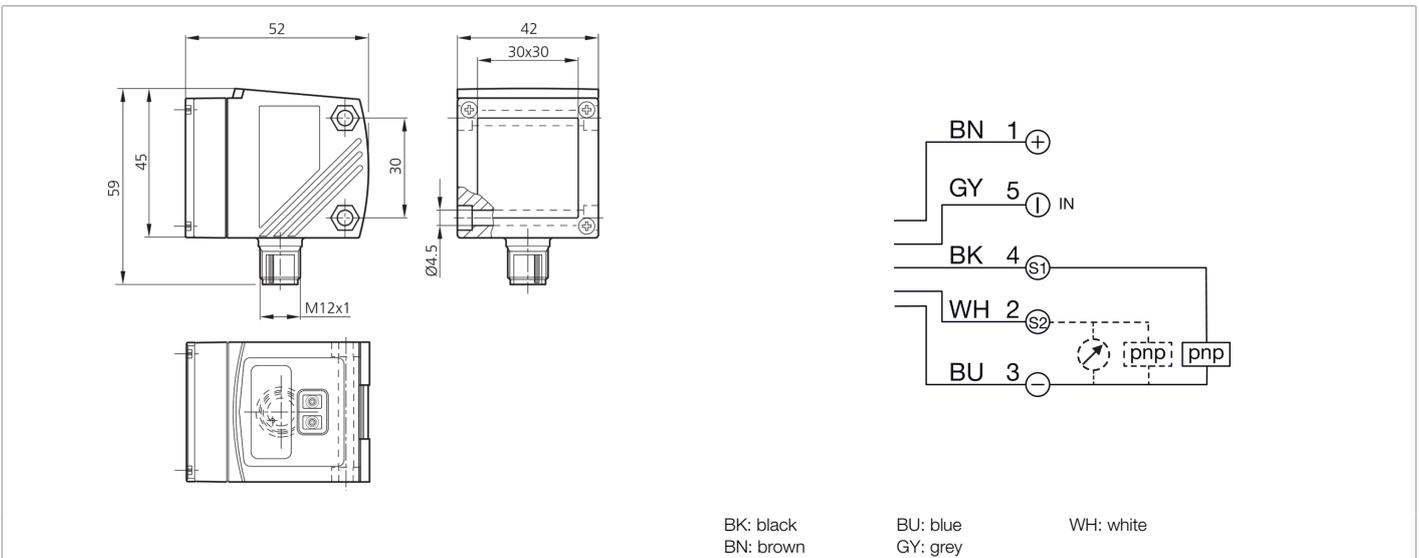

Function												

Technical data (typ.)	+20°C, 24 V DC
Service voltage	18 ... 30 V DC (Supply Class 2)
No-load current (max.)	150 mA
Housing dimensions	45 x 52 x 42 mm
Housing length	52 mm
Housing height	45 mm
Housing width	42 mm
Housing material	Die-cast zinc (Black, painted)
Material window / optics	Glass
Weight	309 g
Protection class	III, operation on protective low voltage
Approvals	UL
Design	Cuboid design
Switching output	pnp (2x), 200 mA, NO/NC, configurable
Analog output	0 ... 10 V, 4 ... 20 mA
Interface	<ul style="list-style-type: none"> ■ IO-Link V1.1, COM2 ■ Smart Sensor Profile
Light source	Laser
Laser class	CLASS 1 LASER PRODUCT, 1 (IEC 60825-1:2014 / EN 60825-1:2014)
Color	Red (Pp < 4 mW t = 1.3 ns)
Background suppression	10000 ... 100000 mm



213002
LAT45-10MIU-B5
Laser distance sensors

Technical data (typ.)	+20°C, 24 V DC
Light spot size	Ø 15 mm (at distance of 10 m)
Ambient light immunity	100 kLx
Measuring range	200 ... 10000 mm (90 % remission)
Resolution	1.0 mm (90% remission, measuring frequency 15 Hz)
Reproducibility	4.5 ... 50 mm (90% remission, measuring frequency 15 Hz)
Linearity error	± 15 mm (90% remission, measuring frequency 15 Hz)
Sensitivity adjustment	Keypad
Display	LED green - Status, yellow - Switching output
Measuring frequency	1.0 ... 33 Hz
Switching frequency	0.3 Hz ... 11 Hz
Ambient temperature during operation	-10 ... +60 °C
Protection type	IP 67
Connection	Connector, M12, 5-pin
Connection cable	VK ... /5
More information / accessories	https://www.di-soric.com/213002